


PART NUMBER
 40GSH - 1 6 * - 1 2 8 L

SERIES
 NO. OF POS.
 CONTACT PLATED OPTION
 1: GOLD FLASH
 3: Au 10u"

LEAD FREE
 TAPE REEL PACKAGE

- C1:VCC
- C2:RST
- C3:CLK
- C4:Reserved
- C5:GND
- C6:VPP
- C7:1/0
- C8:Reserved

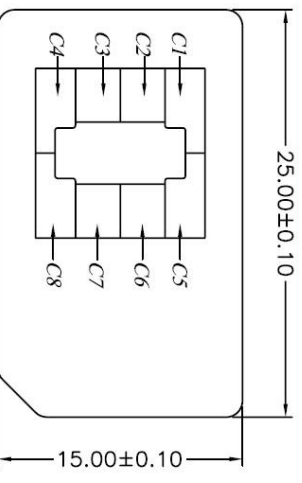

MATERIALS
 HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: STAINLESS STEEL, NICKEL
 TERMINAL: PLATED GOLD BRONZE, GOLD SOLDER AREA
 MATE TIN PLATED SOLDER AREA
 NICKEL UNDER PLATING OVER ALL

SPECIFICATION
 CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MIN AT DC 20mA
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C+85°C

B	UPDATE	2015.11.25
A	RELEASE	2015.11.05
REV.	DESCRIPTION	DATE

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	1/0
C8	Reserved

SPK Electronics Co., Ltd.

LINEAR: .XX40.30 .XX40.20 .XX40.10
 ANGLES: 45°

APPROVALS
 DRAWN: *J. Yimern*
 CHECKED: *C. Yric*
 APPROVED: *J. Yimern*

10270

SERIES: MEMORY CARD CONNECTOR SERIES

TITLE: SIM CARD, STACKED, PCB MOUNT, SMT, FEMALE, H=3.0MM

SIZE: A4
 VERSION: B
 DWG NO.: SPK-CON-40GS-009

SCALE: NONE
 UNIT: mm
 SHEET: 1 OF 1

1


2

3

4

A

- 一、
- 1) 將成品一一放入包裝盤內, 依同一方向放入.
- 2) 包裝時, 如圖所示.
- 3) 一個包裝盤放置700個成品.

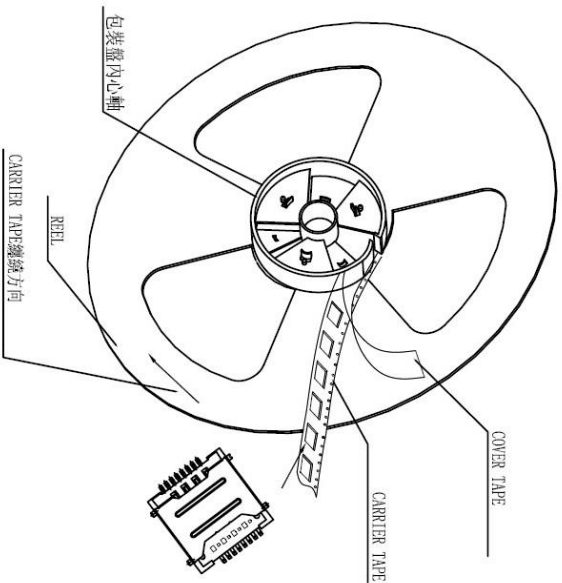


D

C

B

A	RELEASE	2015.11.05
REV.	DESCRIPTION	DATE
1		

- 一、
- 1) 一只紙箱可放置5個包裝盤.
- 2) 一只紙箱可放3500PCS的成品.
- 3) 將成品放入包裝盤內包裝完後再裝箱.

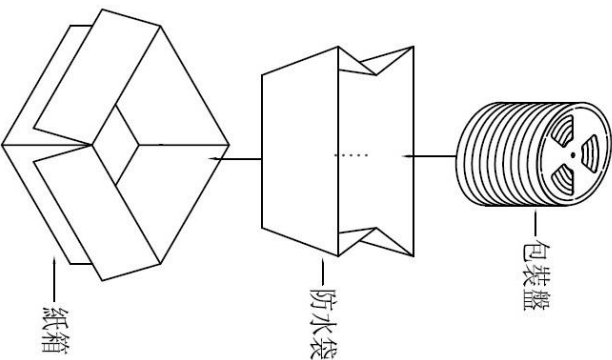

SERIES: SPK Electronics Co., Ltd.

TITLE: MEMORY CARD CONNECTOR SERIES

LINEAR: X440 30 X440 20 XXX440 10

ANGLES: 45°

APPROVALS

DESIGN: Jimen


CHECKED: Eric

APPROVED: James



10270

产品单重: 1.2g
每盘单重: 1200g

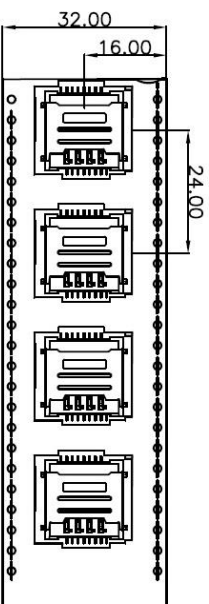

- 二、
- 1) REL 載帶尺寸圖.

SERIES: MEMORY CARD CONNECTOR SERIES	
TITLE: SIM CARD, STACKED, PCB MOUNT, SMT, FEMALE, H=3.0MM PACKING	
LINEAR: X440 30 X440 20 XXX440 10	APPROVALS
ANGLES: 45°	DESIGN: Jimen
	CHECKED: Eric
	APPROVED: James
SIZE: A4	VERSION: A
SCALE: NONE	DWG NO: SPK-CON-40GS-009 PACKAGE
	UNIT: mm
	SHEET: 1 OF 1

D

C

B

A

1

2

3

4